
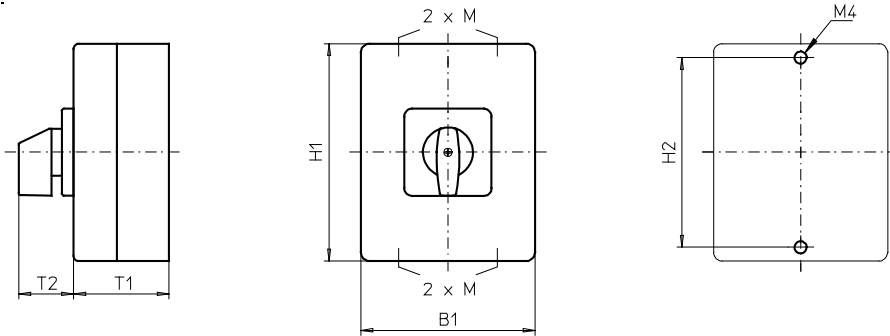


# Enclosed Switches

**sälzer**



**Product line**  
**H200-A**

**Enclosed switch**

**Insulated enclosure**  
125 × 100 × 85 mm

with cover interlock  
in ON position

with N/PE connection link

**Cable entries**  
4 × M20/M25

**701M1** (IP66)

Complete switch	Poles	Product lines	Rated data (IEC 60947)			Order code number
			Operational current $I_e$	Operational power at 380–440V		
			AC-21A A	AC-23A kW	AC-3 kW	
ON-OFF Switches Switching angle 90°	3 ... 4	H200-A	20	5,5	3,7	<b>H216 - 41 ... - 701M1</b>
			25	7,5	5,5	<b>H220 - 41 ... - 701M1</b>
			32	11	7,5	<b>H226 - 41 ... - 701M1</b>

### SMD modules for basic switch A02

Mounting form module for 701M1	H200-A	<b>BFA2 - E7</b>
Enclosure module, mounting form 701M1	H200-A	<b>PAH2 - 701M1</b>
Legend plate silver, enclosure module 701M1	H200-A	<b>FAS2 - 9...</b> (FA number)

### Dimensions (mm)

Product line	H1	B1	T1	T2	2xM	H2
H200-A	125	100	85	32	20/25	115