


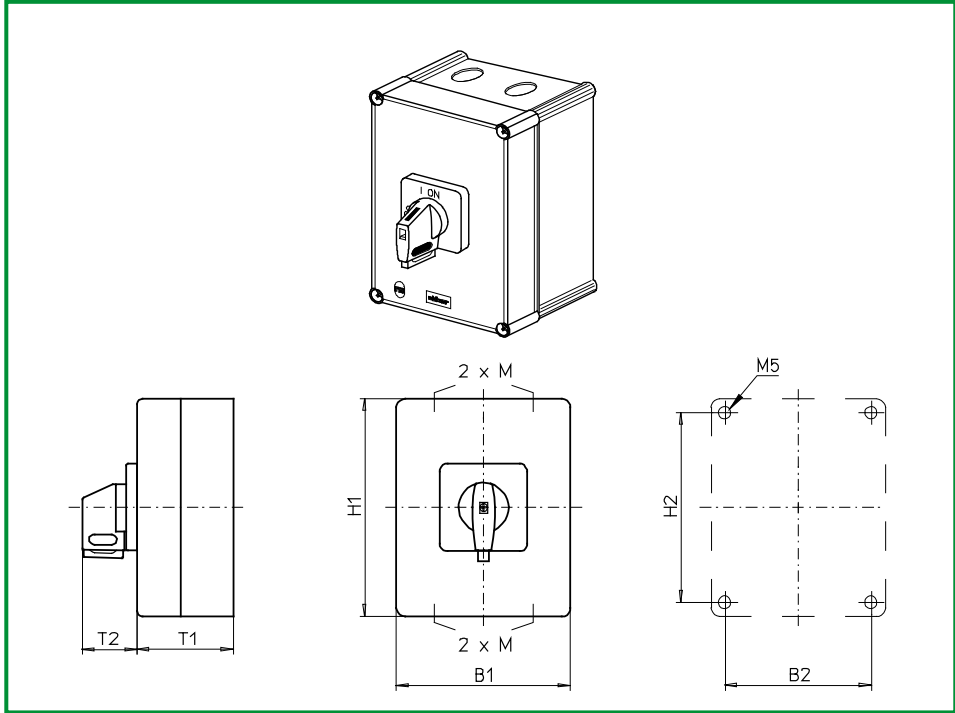

Product line
H200-E

Insulated enclosure
Polycarbonate
280 × 190 × 130 mm

with cover interlock
in ON position

Cable entries
4 × with screw thread
M40x1,5

with PE terminal
without N terminal

772V1 (IP66)

773V1 (IP66)

Complete switch	Poles	Product lines	Rated data (IEC 60947)			Order code number	
			Operational current I _e	Operational power at 380–440V			
				AC-21A A	AC-23A kW		AC-3 kW
Changeover with OFF Switching angle 90° OFF position padlockable 12h	3 ... 4	H200-E	20	5,5	3,7	H216 - 71 ... - 772V1	
			25	7,5	5,5	H220 - 71 ... - 772V1	
			32	11	7,5	H226 - 71 ... - 772V1	
			40	15	11	H233 - 71 ... - 772V1	
Changeover with OFF Switching angle 90° 3 positions padlockable (09h/12h/03h)	3 ... 4	H200-E	20	5,5	3,7	H216 - 71 ... - 773V1	
			25	7,5	5,5	H220 - 71 ... - 773V1	
			32	11	7,5	H226 - 71 ... - 773V1	
			40	15	11	H233 - 71 ... - 773V1	
Realisable switching programmes:							
3 pole	71300, 71301, 71302, 71310, 71311, 71312						
	71320, 71321, 71322						
4 pole	71400						
SMD modules for basic switch A02							
Mounting form module for 772V1/773V1			H200-E			BFB2 - E8	
Enclosure module, mounting form 772V1						PAH2 - 772V1	
Enclosure module, mounting form 773V1						PAH2 - 773V1	
Legend plate silver, enclosure module 772V1/773V1						FAS4 - 9... (FA number)	
Dimensions (mm)							
Product line	H1	B1	T1	T2	2xM	H2	B2
H200-D	280	190	130	39	40x1,5	254	164