


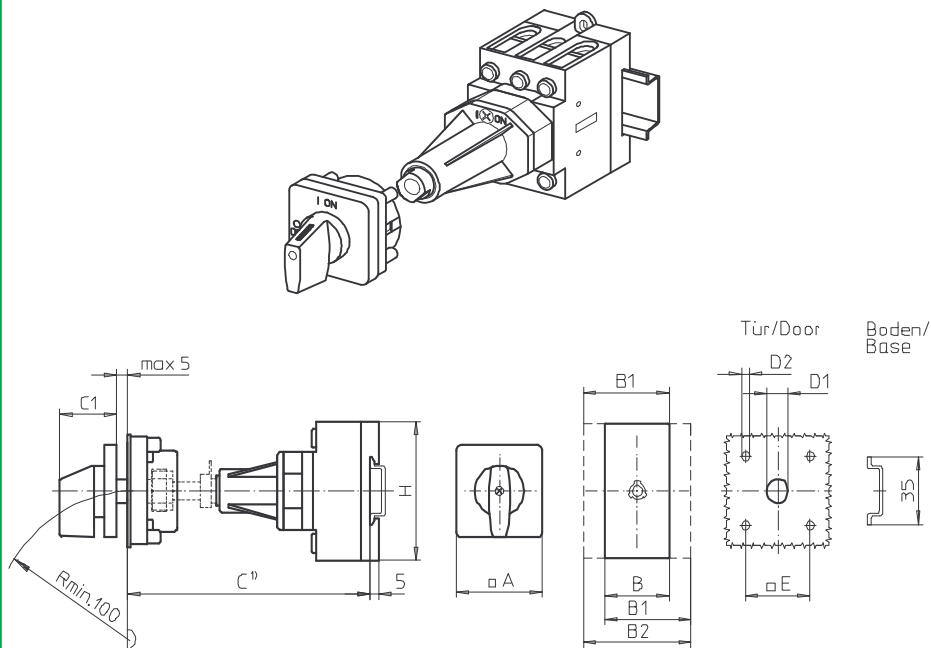

Product lines

H400-A/ -D/ -E

Base mounting switch

Door interlock

Metal shaft extension

Four hole mounting

48 x 48 mm front

481M1 (IP66)

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I _e	Operational power at 380–440 V		
			AC-21A A	AC-23A kW	AC-3 kW	
ON-OFF Switches Switching angle 90°	3 ... 8	H400-A/ -D	63	22	18,5	H406 - 41 ... - 481M1
			80	30	22	H408 - 41 ... - 481M1
			100	37	30	H410 - 41 ... - 481M1
			125	45	37	H412 - 41 ... - 481M1
Changeover with OFF Switching angle 90°	3 ... 4	H400-E	63	22	18,5	H406 - 71 ... - 481M1
			80	30	22	H408 - 71 ... - 481M1
			100	37	30	H410 - 71 ... - 481M1
			125	45	37	H412 - 71 ... - 481M1

SMD modules for basic switch A02

Mounting form module for 481M1

Mounting form module for 481M1

M-operator module 64 x 64 mm, mounting form 481M1

Escutcheon black, handle black

Legend plate silver, operator module 481M1

H400-A/ -D

H400-E

BFA4 - 481

BFB4 - 481

4AM1

FAS4 - 9... (FA number)

Dimensions (mm)

Product lines	A	B	B1	B2	C1	D1	D2	E	H
H400-A	64	70	89	108	40	15	5	48	80
H400-D/ -E	64	140	159	178	40	15	5	48	80

C¹⁾ Internal depth, inside of door to top of DIN rail. Metal shaft is not included. Please order separately. See page B8-8.