
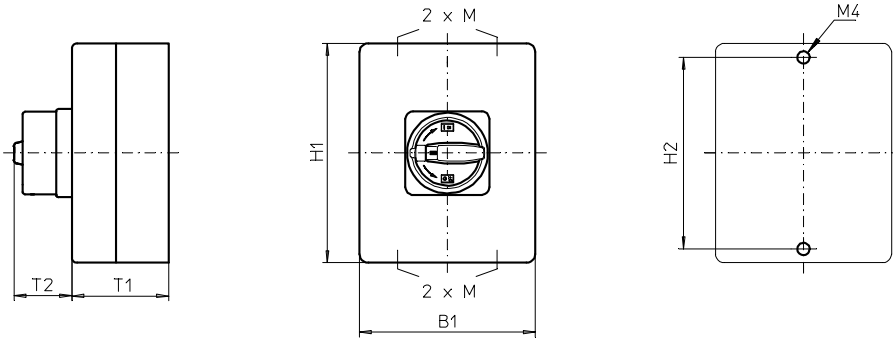


# Enclosed Switches

# sälzer



**Product line**  
**M200**

**Enclosed Switches**

**Insulated enclosure**  
100 x 80 x 85 mm

**Cable entries**  
4 x M20

**177M1 (IP66)**

**177M4 (IP66)**

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I <sub>e</sub>	Operational power at 380–440 V		
			AC-21A A	AC-23A kW	AC-3 kW	
Main Switches OFF position padlockable 09h	5 ... 8	M200	20	7,5	5,5	<b>M220 - 61 ... - 177M1</b>
Main/Emergency-Off Switches OFF position padlockable 09h	5 ... 8	M200	20	7,5	5,5	<b>M220 - 61 ... - 177M4</b>
<b>SMD modules for basic switch</b>						
Mounting form module for 177M., 3 contact stages			M220			<b>BFE2 - EA</b>
Mounting form module for 177M., 4 contact stages			M220			<b>BFF2 - EA</b>
Enclosure module, mounting form 177M1						<b>PAM2 - 177M1</b>
Enclosure module, mounting form 177M4						<b>PAM2 - 177M4</b>
<b>Dimensions (mm)</b>						
<b>Product line</b>	<b>H1</b>	<b>B1</b>	<b>T1</b>	<b>T2</b>	<b>2xM</b>	<b>H2</b>
M220	100	80	85	38	20	90