


Enclosed Switches

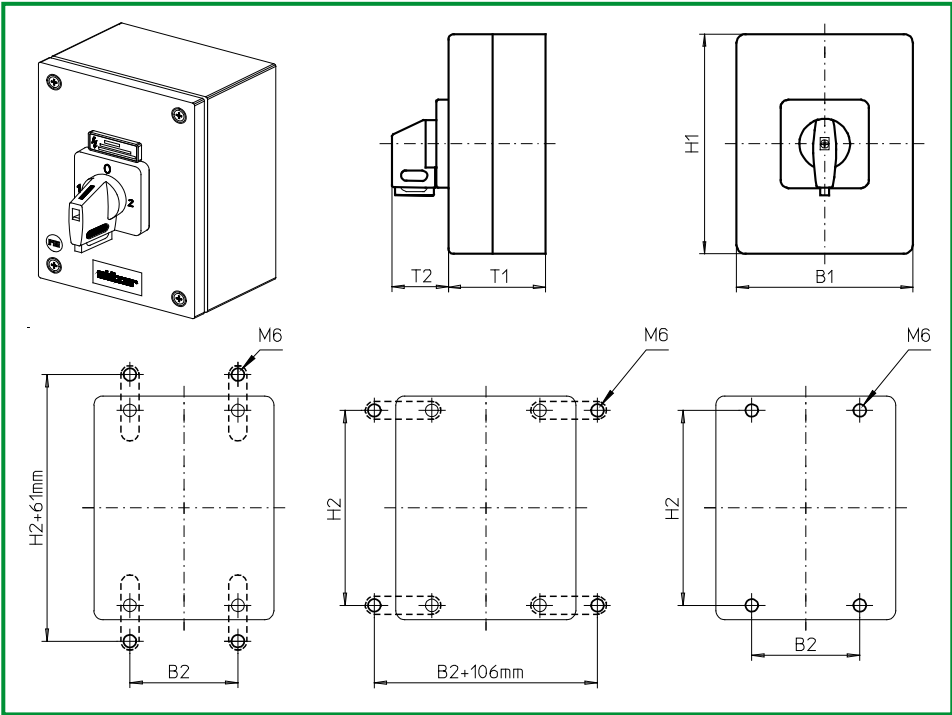

Product line
H200-E

Enclosed switch

Mild steel enclosure
200 × 150 × 120 mm

with cover interlock
in ON position

with N/PE connection link

186V1 (IP66)

188V1 (IP66)

Complete switch	Poles	Product lines	Rated data (IEC 60947)			Order code number
			Operational current I _e	Operational power at 380–440V		
			AC-21A A	AC-23A kW	AC-3 kW	
Changeover with OFF Switching angle 90° OFF position padlockable 12h	3 ... 4	H200-E	20	5,5	3,7	H216 - 71 ... - 186V1
			25	7,5	5,5	H220 - 71 ... - 186V1
			32	11	7,5	H226 - 71 ... - 186V1
			40	15	11	H233 - 71 ... - 186V1
Changeover with OFF Switching angle 90° 3 positions padlockable (09h/12h/03h)	3 ... 4	H200-E	20	5,5	3,7	H216 - 71 ... - 188V1
			25	7,5	5,5	H220 - 71 ... - 188V1
			32	11	7,5	H226 - 71 ... - 188V1
			40	15	11	H233 - 71 ... - 188V1
SMD modules for basic switch A02						
Mounting form module (switch module ED)			H200-E		BFB2 - ED	
Enclosure module, mounting form 186V1			H200-E		SAH2 - 186V1	
Enclosure module, mounting form 188V1			H200-E		SAH2 - 188V1	
Legend plate silver, enclosure module 186V1/188V1			H200-E		FAS4 - 9... (FA number)	
Accessories						
Mounting brackets for enclosure modules SA (1 set)					SAX1	
Dimensions (mm)						
Product line	H1	B1	T1	T2	H2	B2
H200-E	200	150	120	39	182	85