
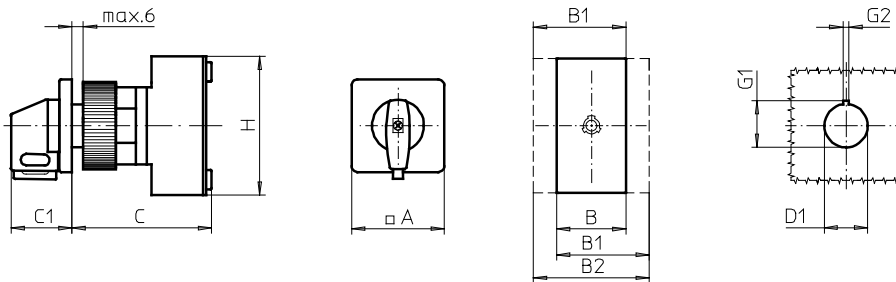


Front Mounting Switches

sälzer



**Product lines
H200-A/-B/-C**

Front mounting switch

Single hole mounting
ø 22,5 mm

206V1 (IP66)
206V4 (IP66)

Complete switch	Poles	Product lines	Rated data (IEC 60947)			Order code number				
			Operational current I _e	Operational power at 380–440V						
			AC-21A A	AC-23A kW	AC-3 kW					
Main Switches OFF position padlockable 09h	3 ... 4	H200-C	20	5,5	3,7	H212 - 41 ... - 206V1				
	3 ... 4	H200-A	20	5,5	3,7	H216 - 41 ... - 206V1				
			25	7,5	5,5	H220 - 41 ... - 206V1				
			32	11	7,5	H226 - 41 ... - 206V1				
			40	15	11	H233 - 41 ... - 206V1				
3 ... 4	H200-B	63	18,5	15	H263 - 41 ... - 206V1					
Main/Emergency-Off Switches OFF position padlockable 09h	3 ... 4	H200-C	20	5,5	3,7	H212 - 41 ... - 206V4				
	3 ... 4	H200-A	20	5,5	3,7	H216 - 41 ... - 206V4				
			25	7,5	5,5	H220 - 41 ... - 206V4				
			32	11	7,5	H226 - 41 ... - 206V4				
			40	15	11	H233 - 41 ... - 206V4				
3 ... 4	H200-B	63	18,5	15	H263 - 41 ... - 206V4					
SMD modules for basic switch A01										
Mounting form module for 206V.			H200-A H200-B/-C		BFA2 - 219 BFB2 - 219					
V-operator module 48 × 48 mm, mounting form 206V1 Escutcheon black, handle black			H200-A/-B/-C		2DV1 - 09					
Legend plate silver, operator module 206V1					FAS2 - 9078					
V-operator module 48 × 48 mm, mounting form 206V4 Escutcheon black, handle red					2DV4 - 09					
Legend plate yellow, operator module 206V4					FBS2 - 9078					
Dimensions (mm)										
Product lines	A	B	B1	B2	C	C1	D1	G1	G2	H
H200-A	48	36	48	60	75	32	22,5	24,2	3,2	70
H200-B	48	50	69	88	75	32	22,5	24,2	3,2	72
H200-C	48	45	-	-	70	32	22,5	24,2	3,2	45