
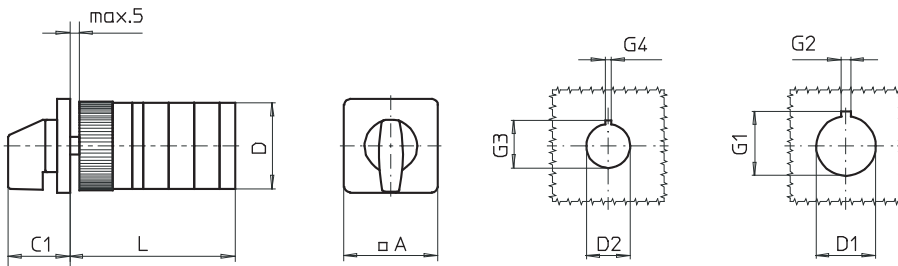


Front Mounting Switches

sälzer



**Product line
P100**

Front mounting switch

Single hole mounting
ø 16 mm / 22,5 mm

219M1 (IP66)

| Complete switch | Poles | Product line | Rated data (IEC 60947) | | | Order code number |
|---|----------|--------------|------------------------------------|-------------------------------|------------|------------------------------|
| | | | Operational current I _e | Operational power at 380-440V | | |
| | | | AC-21A A | AC-23A kW | AC-3 kW | |
| Rotary Cam Switch Switching angle 30°/ 45°/ 60°/ 90° | 1 ... 16 | P100 | 10 | 3 | 2,2 | P110 - 61 ... - 219M1 |

| SMD modules for basic switch A01 | | | |
|---|--|------|--------------------------------|
| Mounting form module for 219M1 | | P100 | BFA1 - 219 |
| M-operator module 30 x 30 mm, mounting form 219M1 | | | 1CM1 |
| Escutcheon black, handle black | | | |
| Legend plate silver, operator module 219M1 | | | FAS1 - (FA number) |

| Dimensions in mm | | | | | | | | | | | | | | |
|------------------|----|----|----|------|------|------|-----|------|-----|----------------------------|----|----|----|-----------------|
| Type | A | C1 | D | D1 | D2 | G1 | G2 | G3 | G4 | L with ... stages (max. 8) | | | | each add. stage |
| | | | | | | | | | | 1 | 2 | 3 | 4 | |
| P110 | 30 | 26 | 29 | 22,5 | 16,2 | 24,2 | 3,2 | 17,9 | 1,7 | 57 | 69 | 81 | 93 | 12 |