

Base Mounting Switches

sälzer


Product lines
H200-A/-B/-D/-E

Base mounting switch
Operator module of next size

Door interlock
Metal shaft extension
With shaft retaining bush

Single hole mounting
ø 22,5 mm front

285M1 (IP66)

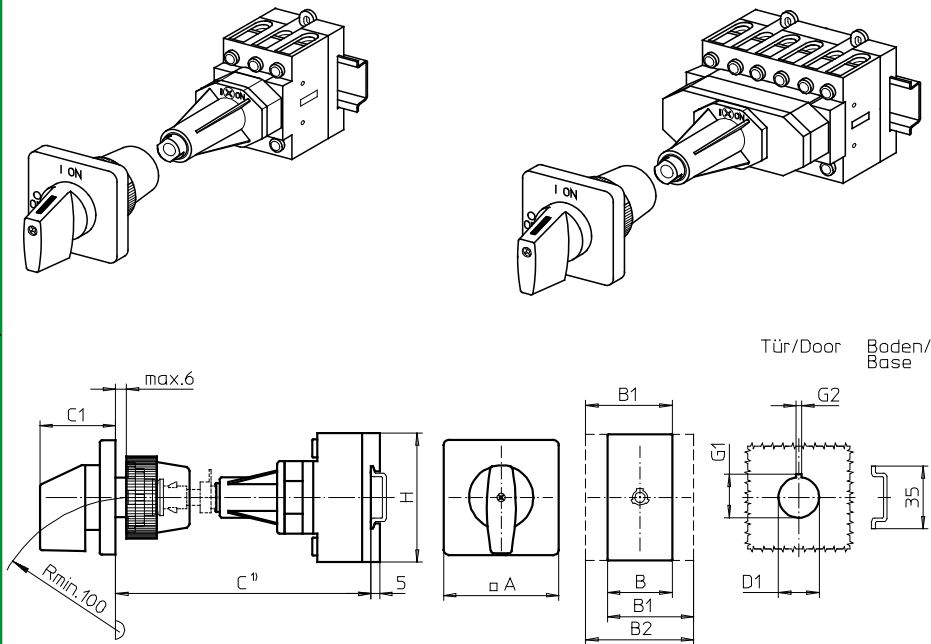

Complete switch	Poles	Product lines	Rated data (IEC 60947)			Order code number			
			Operational current I _e	Operational power at 380–440V					
				AC-21A A	AC-23A kW		AC-3 kW		
ON-OFF Switches Switching angle 90°	3 ... 8	H200-A/-D	20	5,5	3,7	H216 - 41 ... - 285M1			
			25	7,5	5,5	H220 - 41 ... - 285M1			
			32	11	7,5	H226 - 41 ... - 285M1			
			40	15	11	H233 - 41 ... - 285M1			
	3 ... 4	H200-B	63	22	18,5	H263 - 41 ... - 285M1			
Changeover with OFF Switching angle 90°	3 ... 4	H200-E	20	5,5	3,7	H216 - 71 ... - 285M1			
			25	7,5	5,5	H220 - 71 ... - 285M1			
			32	11	7,5	H226 - 71 ... - 285M1			
			40	15	11	H233 - 71 ... - 285M1			
SMD modules for basic switch A02									
Mounting form module for 285M1			H200-A H200-B/-D H200-E		BFA2 - 281 BFB2 - 281 BFC2 - 281				
M-operator module 64 × 64 mm, mounting form 285M1 Escutcheon black, handle black			H200-A/-B/-D H200-E		2NM1 2IM1				
Legend plate silver, operator module 285M1						FAS4 - 9... (FA number)			
Dimensions (mm)									
Product lines	A	B	B1	B2	C1	D1	G1	G2	H
H200-A	64	36	48	60	39	22,5	24,2	3,2	70
H200-B	64	50	69	88	39	22,5	24,2	3,2	72
H200-D	64	72	84	96	39	22,5	24,2	3,2	70
H200-E	64	72	84	96	39	22,5	24,2	3,2	70
C¹⁾ Internal depth, outside of door to top of DIN rail. Metal shaft is not included. Please order separately. See page B6-17.									