




Front Mounting Switches

sälzer



Product lines
M200 / T200


Front mounting switch
With front ring
Key operated

Single hole mounting
ø 22,5 mm

R001. (IP40)

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I _e	Operational power at 380–440 V		
			AC-21A A	AC-23A kW	AC-3 kW	
Rotary Cam Switches Switching angle 30°/45°/60°/90°	1 ... 16	M200	20	7,5	5,5	M220 - 61 ... - R001.
			25	11	7,5	M225 - 61 ... - R001.
	1 ... 12	T200	32	15	11	T225 - 61 ... - R001.

The dot in the order code number of the complete mounting form/operator module must be replaced by the classification letter which identifies the key removable positions:

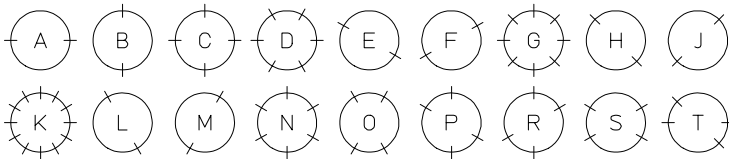

Lines indicate the key removable positions.

SMD modules for basic switch

Mounting form module for R001.

M200 / T200

BFA2 - S

Front ring black ø 30,5 mm, mounting form R001.

2BS1-001.

Ronis lock C001, 2 keys
(Front ring without legend)

Dimensions (mm)

Product lines	C1	D	D1	D2	G1	G2	L with ... stages							
							1	2	3	4	5	6	7	8
M220	33	46	22,5	30,5	24,2	3,2	59	69	79	89	99	109	119	129
M221	33	46	22,5	30,5	24,2	3,2	62	75	88	101	114	127	140	153
M225	33	48	22,5	30,5	24,2	3,2	62	75	88	101	114	127	140	153
T225	33	50	22,5	30,5	24,2	3,2	64	79	94	109	124	139	-	-