


Base Mounting Switches

sälzer

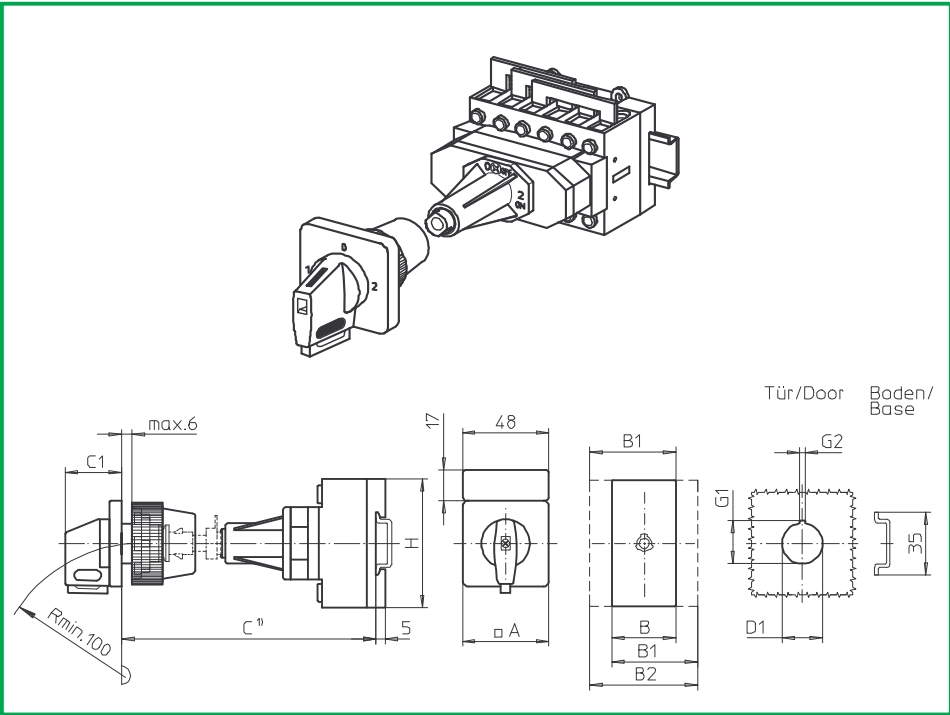

Product line
H400-E

Base mounting switch

Door interlock
Metal shaft extension

Single hole mounting
ø 22,5 mm front

283V1 (IP66)
293V1 (IP66)

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number			
			Operational current I _e	Operational power at 380–440 V					
				AC-21A A	AC-23A kW		AC-3 kW		
Changeover with OFF Switching angle 90° OFF position padlockable 12h	3 ... 4	H400-E	63	22	18,5	H406 - 71 ... - 283V1			
			80	30	22	H408 - 71 ... - 283V1			
			100	37	30	H410 - 71 ... - 283V1			
			125	45	37	H412 - 71 ... - 283V1			
Changeover with OFF Switching angle 90° 3 positions padlockable (09h/12h/03h)	3 ... 4	H400-E	63	22	18,5	H406 - 71 ... - 293V1			
			80	30	22	H408 - 71 ... - 293V1			
			100	37	30	H410 - 71 ... - 293V1			
			125	45	37	H412 - 71 ... - 293V1			
SMD modules for basic switch A02									
Mounting form module for 283V1/ 293V1			H400-E		BFB4 - 281				
V-operator module 64 x 64 mm, mounting form 283V1 Escutcheon black, handle black					2IV1 - 12				
V-operator module 64 x 64 mm, mounting form 293V1 Escutcheon black, handle black					2IV1 - 99				
Legend plate silver, operator module 283V1/ 293V1					FAS4 - 9... (FA number)				
Dimensions (mm)									
Product line	A	B	B1	B2	C1	D1	G1	G2	H
H400-E	64	140	159	178	39	22,5	24,2	3,2	80