
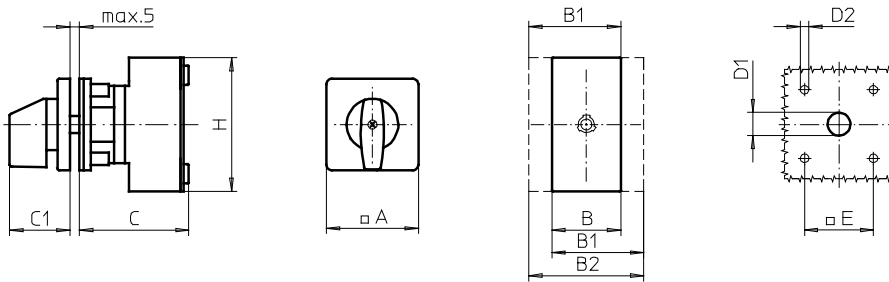


# Front Mounting Switches

**sälzer**



**Product lines  
H200-A/-B/-C**

**Front mounting switch**

**Four hole mounting  
36 × 36 mm**

**003M1 (IP66)**

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I <sub>e</sub>	Operational power at 380–440V		
			AC-21A A	AC-23A kW	AC-3 kW	
ON-OFF Switches Switching angle 90°	3 ... 4	H200-C	20	5,5	3,7	<b>H212 - 41 ... - 003M1</b>
	3 ... 4	H200-A	20	5,5	3,7	<b>H216 - 41 ... - 003M1</b>
			25	7,5	5,5	<b>H220 - 41 ... - 003M1</b>
			32	11	7,5	<b>H226 - 41 ... - 003M1</b>
			40	15	11	<b>H233 - 41 ... - 003M1</b>
	3 ... 4	H200-B	63	22	18,5	<b>H263 - 41 ... - 003M1</b>

SMD modules for basic switch A02		
Mounting form module for 003M1	H200-A H200-B/-C	<b>BFA2 - 003</b> <b>BFB2 - 003</b>
M-operator module 48 × 48 mm, mounting form 003M1 Escutcheon black, handle black	H200-A/-B/-C	<b>2AM1</b>
Legend plate silver, operator module 003M1		<b>FAS2 - 9...</b> (FA number)

Dimensions (mm)										
Product lines	A	B	B1	B2	C	C1	D1	D2	E	H
H200-A	48	36	48	60	58	32	12	4,5	36	70
H200-B	48	50	69	88	58	32	12	4,5	36	72
H200-C	48	45	-	-	50	32	12	4,5	36	45