



Front Mounting Switches

sälzer




M220/ M225



T225

Schalter/Switch

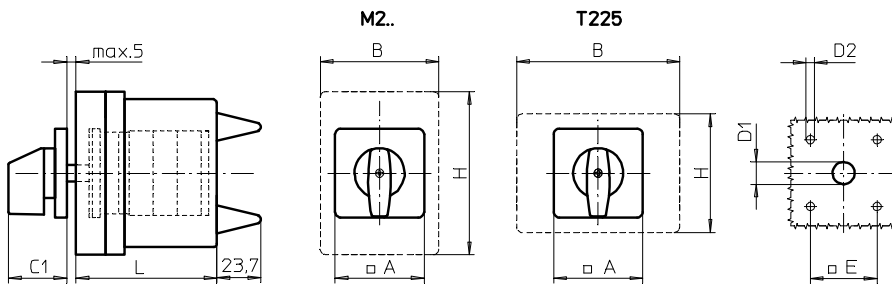

Product lines
M200 / T200

Front mounting switch
With dust protection cover

Four hole mounting
36 x 36 mm

005M1 (IP66)

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I _e	Operational power at 380–440 V		
			AC-21A A	AC-23A kW	AC-3 kW	
Rotary Cam Switches Switching angle 30°/45°/60°/90°	1 ... 8	M200	20	7,5	5,5	M220 - 61 ... - 005M1
	1 ... 6		25	11	7,5	M225 - 61 ... - 005M1
	1 ... 4	T200	32	15	11	T225 - 61 ... - 005M1

SMD modules for basic switch

Mounting form module for 005M1

M200
T200

BFA2 - 005
BFB2 - 005

M-operator module 48 x 48 mm, mounting form 005M1
Escutcheon black, handle black

M200 / T200

2AM1

Legend plate silver, operator module 005M1

FAS2 - (FA number)

Dimensions (mm)

Product lines	A	B	C1	D1	D2	E	H	L with ... stages			
								1	2	3	4
M220	48	64	32	12	4,5	36	88	80	80	80	80
M221	48	64	32	12	4,5	36	88	80	80	80	-
M225	48	64	32	12	4,5	36	88	80	80	80	-
T225	48	88	32	12	4,5	36	64	80	80	-	-