


Front Mounting Switches

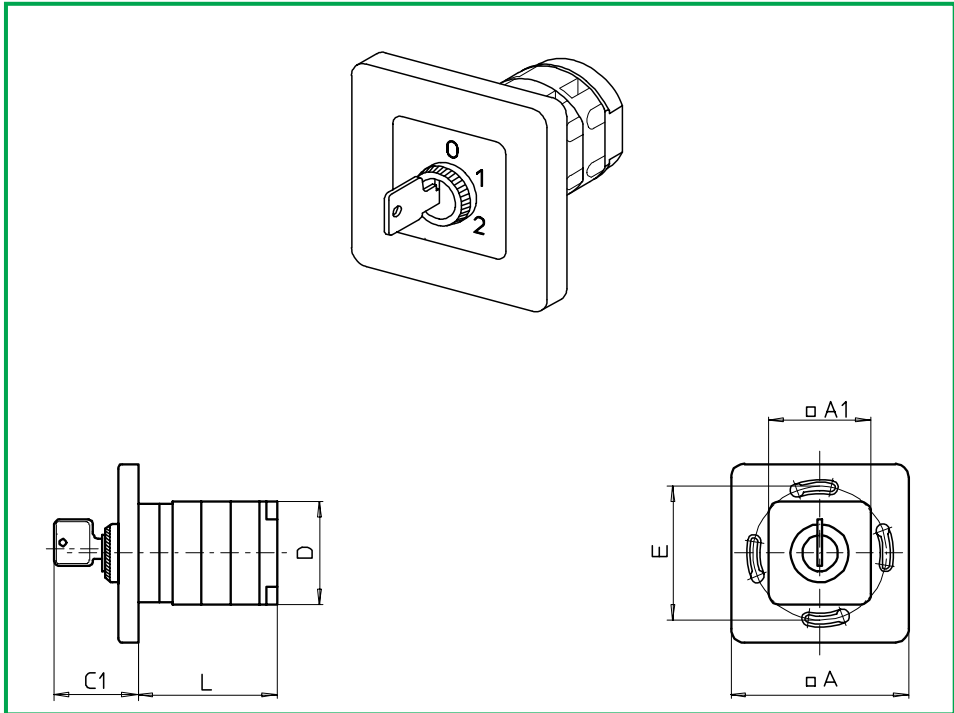

Product lines
M200 / T200

Front mounting switch

Wall mounting

Escutcheon
90 x 90 mm white

Key operated

U001. (IP40)

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I _e	Operational power at 380–440 V		
			AC-21A A	AC-23A kW	AC-3 kW	
Rotary Cam Switches	1 ... 8	M200	20	7,5	5,5	M220 - 61 ... - U001.
Switching angle 60°/ 90°			25	11	7,5	M225 - 61 ... - U001.
(30°/45° upon request)	1 ... 8	T200	32	15	11	T225 - 61 ... - U001.

The dot in the order code number of the complete mounting form/operator module must be replaced by the classification letter which identifies the key removable positions:

A

B

C

D

E

F

L

M

N

O

P

R

S

Lines indicate the key removable positions.

SMD modules for basic switch		
Mounting form module for U001.	M200 / T200	BFA2-U001.
Operator module 90 x 90 mm, mounting form U001.		
Escutcheon white, DOM lock, (2 keys), key number 7 D1		
Legend plate silver		FAS4 - (FA number)

Dimensions (mm)									
Product lines	A	A1	C1	D	E	L with ... stages		3	4
						1	2		
M220	90	61	42	46	60	44	54	64	74
M221	90	61	42	46	60	47	60	73	86
M225	90	61	42	48	60	39	60	73	73
T225	90	61	42	50	60	49	64	79	94