


Enclosed Switches

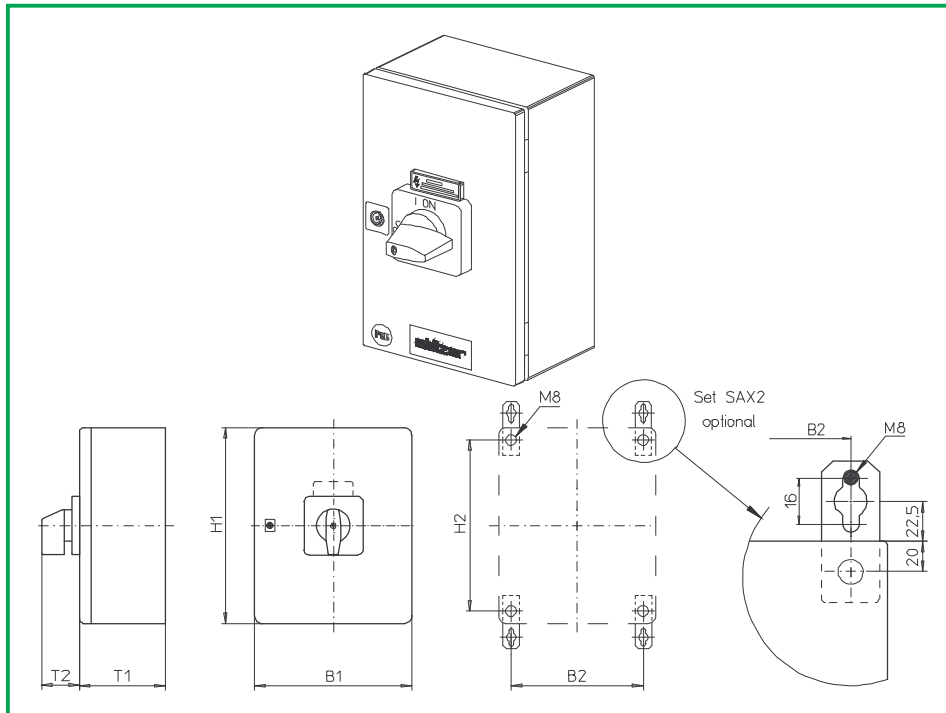

Product lines
H400-A/ -D/ -E

Mild steel enclosure
including door
large connection room
400 x 300 x 155 mm

With cover interlock
in ON position

Cable entries
Gland plate at the bottom

181M1 (IP66)

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I_e	Operational power at 380–440 V		
			AC-21A A	AC-23A kW	AC-3 kW	
ON-OFF Switches Switching angle 90°	3 ... 8	H400-A/ -D	63	22	18,5	H406 - 41 ... - 181M1
			80	30	22	H408 - 41 ... - 181M1
			100	37	30	H410 - 41 ... - 181M1
			125	45	37	H412 - 41 ... - 181M1
Changeover with OFF Switching angle 90°	3 ... 4	H400-E	63	22	18,5	H406 - 71 ... - 181M1
			80	30	22	H408 - 71 ... - 181M1
			100	37	30	H410 - 71 ... - 181M1
			125	45	37	H412 - 71 ... - 181M1

SMD modules for basic switch A02		
Mounting form module (switch module E8)	H400-A	BFB4 - E8
Mounting form module (switch module E8)	H400-D/ -E	BFA4 - E8
Enclosure module, mounting form 181M1	H400-A/ -D/ -E	SAH4 - 181M1
Legend plate silver, enclosure module 181M1		FAS6 - 9 ... (FA number)
Mounting brackets for enclosure modules (Please order separately)		SAX2

Dimensions (mm)						
Product lines	H1	B1	T1	T2	H2	B2
H400-A	400	300	155	52	360	260
H400-D	400	300	155	52	360	260
H400-E	400	300	155	52	360	260